

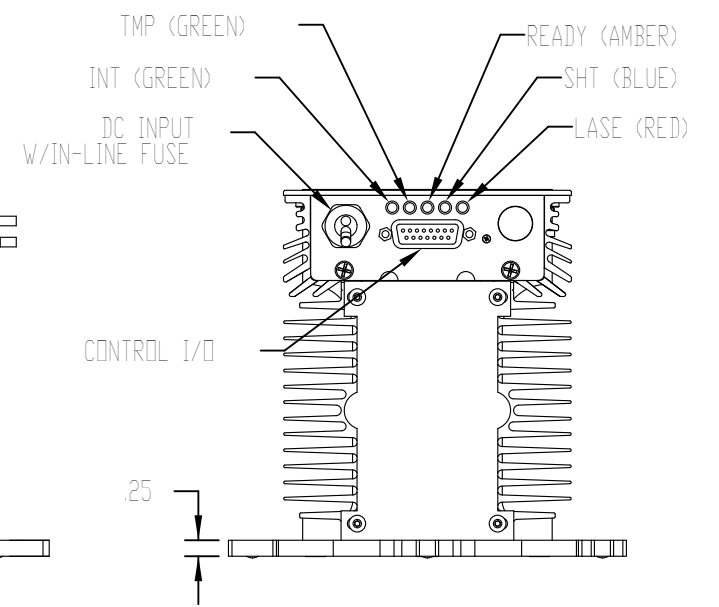
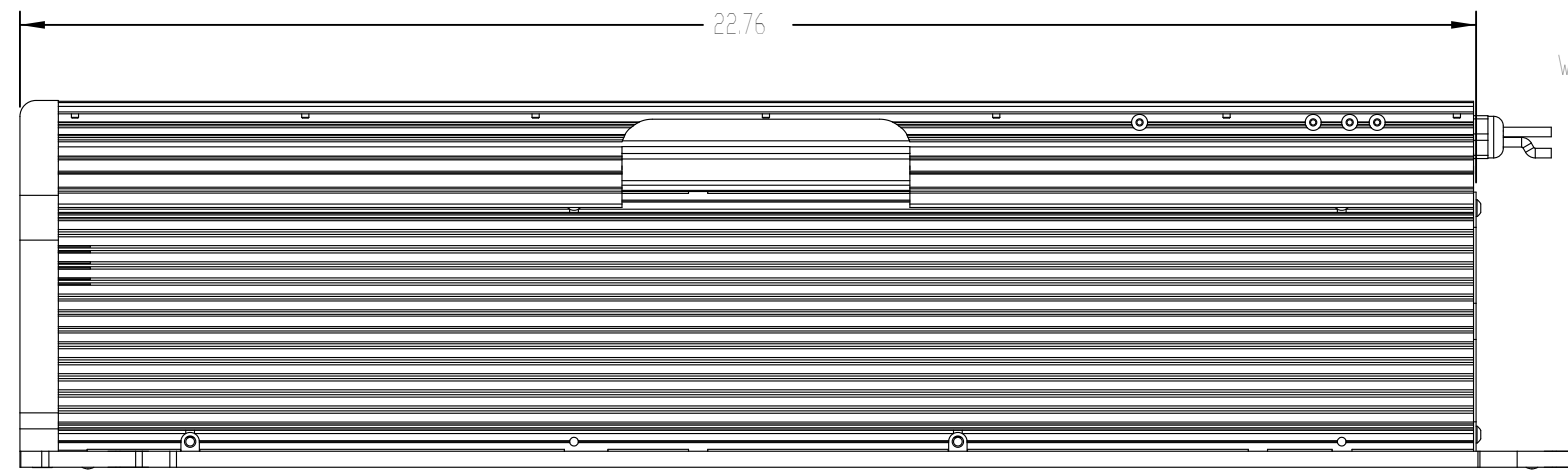


REV	ECO	DATE	DESCRIPTION	DB
C	3912	8-Aug-08	ADD BEAM EXITØ, CONVERT TO SOLIDWORKS	DMD
D	4107	8-Sep-09	ADD NOTE 4	DMD

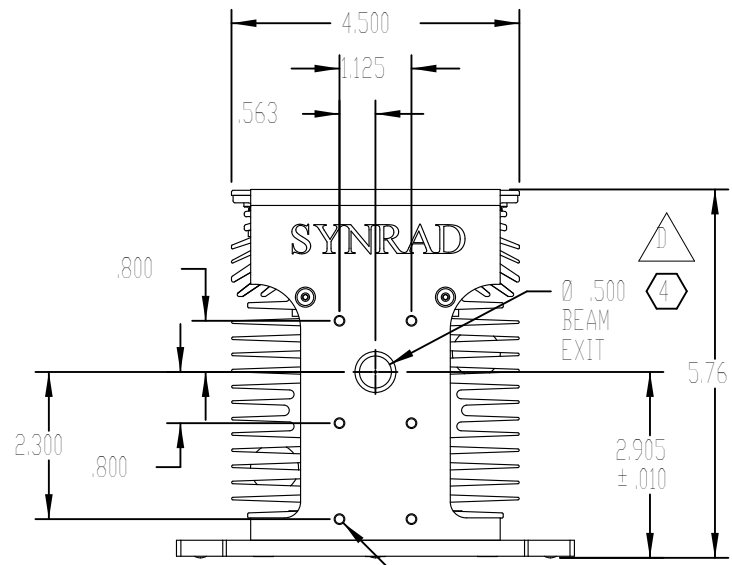

6X 8-32 UNC ACCESSORY
MTG HOLES. SCREWS SHOULD
NOT EXTEND MORE THAN
.19 INTO FACE PLATE

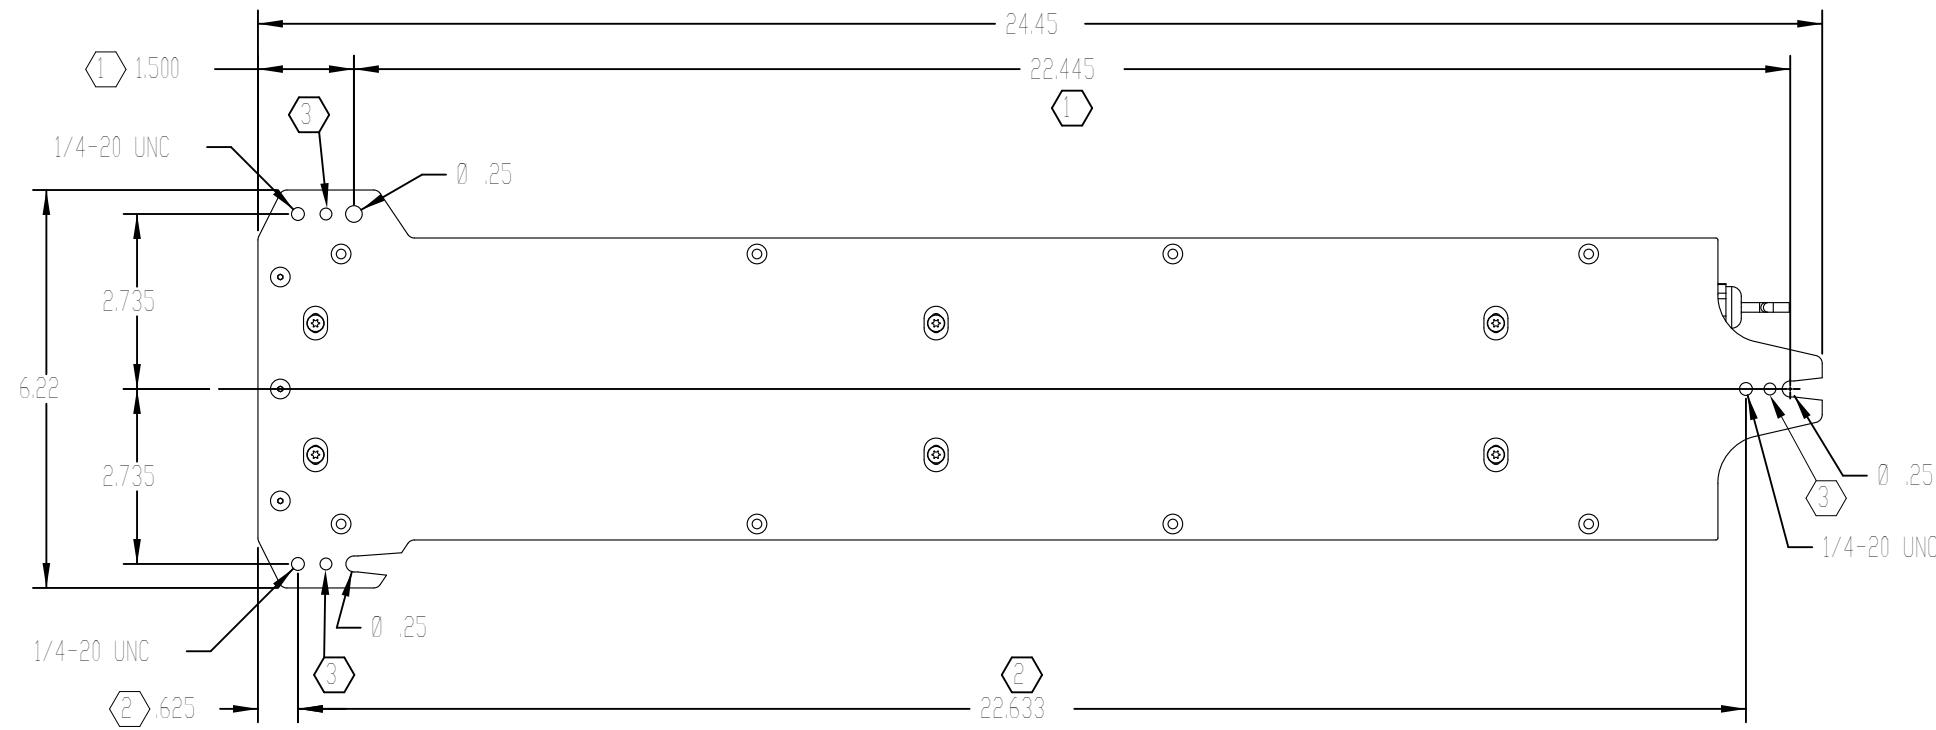

NOTES:

- ① THIS MOUNTING HOLE PATTERN USED WHEN TOP ACCESS FASTENING DESIRED.
- ② THIS MOUNTING PATTERN USED WHEN BOTTOM ACCESS FASTENING DESIRED.
- ③ HARDENED BALL MOUNTING POINT, 3X. (Ø.1875 BALL BEARING)
- ④ BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

TOLERANCES UNLESS NOTED:	
.x = ± 0.1	ANGLE = ± 0.5 °
.xx = ± 0.01	
.xxx = ± 0.005	
MATERIAL:	
FINISH:	

PROPRIETARY
THIS DRAWING IS PROPRIETARY TO
SYNRAD INC. AND SHALL NOT BE
USED OR DISCLOSED IN WHOLE
OR IN PART WITHOUT WRITTEN
PERMISSION OF SYNRAD INC.


DESCRIPTION:
OUTLINE & MOUNTING, AIR-COOLED V40, OEM

PART NUMBER: 300-18565-01

SHEET 1 of 1

UNITS: Inches

SIZE: B

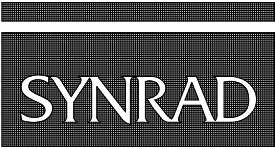		SYNRAD INC. 4600 Campus Place Mukilteo, WA 98275 Phone: (425)349-3500 Fax: (425)349-3667	
		DESCRIPTION: OUTLINE & MOUNTING, AIR-COOLED V40, OEM	
PART NUMBER: 300-18565-01		DWG/FILE NUMBER: 300-18565-01	
DRAWN BY: K. Johnson		DATE: 10-Apr-01	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	